


Cartridge Filters

String Wound Polypropylene Sediment Filter Cartridges

Pure Aqua's string wound polypropylene sediment filters are manufactured from a durable polypropylene cord that is wound around a rigid polypropylene core. They are an economical solution to reduce fine sediment, including sand, silt, rust and scale particles. The cartridges combine quality and cost effectiveness to provide excellent filtration value. Available in a variety of micron ratings and sizes to meet your application needs.

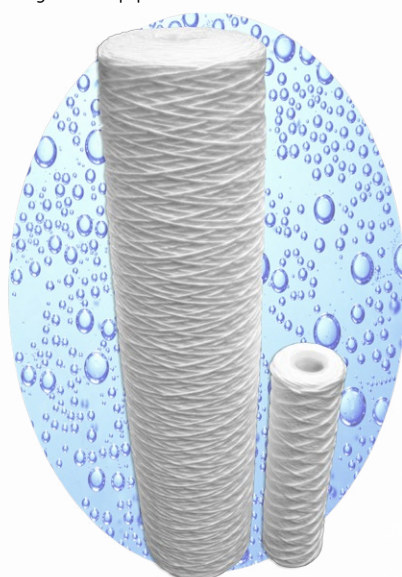

Applications

- Residential
- Commercial
- Fine chemicals
- Metal finishing
- Reverse osmosis pre-filtration
- Food & beverage industry
- Potable water
- Electronics



Features & Benefits

- High flow rate
- Low pressure drop
- High dirt holding capacity
- Wide range of micron ratings
- Wide range of lengths



2.5" Diameter

Part Number	Micron	Length	Case qty
PA-101-S	1	9-7/8"	50
PA-201-S	1	20"	25
PA-301-S	1	30"	25
PA-401-S	1	40"	25
PA-105-S	5	9-7/8"	50
PA-205-S	5	20"	25
PA-305-S	5	30"	25
PA-405-S	5	40"	25
PA-1025-S	25	9-7/8"	50
PA-2025-S	25	20"	25
PA-1050-S	50	9-7/8"	50

Specifications

Material (media)	Polypropylene fiber cord	
Material (core)	Polypropylene	
Length	9-7/8" - 40"	
Diameter	2-1/2" - 4-1/2"	
Maximum temperature	74°C / 165°F	
Micron rating (nominal)	1 - 50	
Maximum flow rate	5 - 28 gpm (2.5" diameter)	10 - 30 gpm (4.5" diameter)
Cartridge packaging	Shrink wrapped	

4.5" Diameter

Part Number	Micron	Length	Case qty
PA-101-BS	1	9-7/8"	8
PA-201-BS	1	20"	6
PA-105-BS	5	9-7/8"	8
PA-205-BS	5	20"	6
PA-1025-BS	25	9-7/8"	8
PA-2025-BS	25	20"	6
PA-1050-BS	50	9-7/8"	8
PA-2050-BS	50	20"	6



Pure Aqua, Inc.®

Water Treatment and Reverse Osmosis Systems

sales@pureaqua.com
www.pureaqua.com

Tel: +1-714-432-9996
Fax: +1-714-432-9898



Authorized Dealer: